





Rexnord Tollok TLK 111

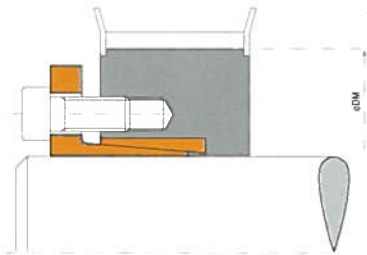

Characteristics


- Medium torque
- Restricted hub diameter
- Limited installation time
- Very low surface pressure

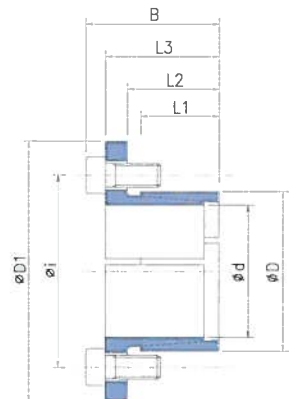

Dimensions						"Tightening screws"	Screws Class: 12.9					Weight
							Tightening torque	Torque	Axial force	Surface pressures on		
										Shaft	Hub	
d x D mm	L1 mm	L2 mm	L3 mm	D1 mm	i mm	Nº x Type	M _t Nm	M _t Nm	F _{ax} KN	P _w N/mm²	P _n N/mm²	Kg
14 x 25	16	20	26	42	33	4 x M4	4,9	110	16	187	105	0,10
15 x 25	16	20	26	42	33	4 x M4	4,9	115	16	175	105	0,09
16 x 25	16	20	26	42	33	4 x M4	4,9	125	16	164	105	0,09
18 x 25	16	20	26	42	33	4 x M4	4,9	140	16	146	105	0,08
19 x 25	16	20	26	42	33	4 x M4	4,9	150	16	138	105	0,08
20 x 30	16	20	26	50	39	4 x M5	10	255	26	214	143	0,12
22 x 30	16	20	26	50	39	4 x M5	10	280	26	195	143	0,11
24 x 30	16	20	26	50	39	4 x M5	10	310	26	179	143	0,10
25 x 36	16	20	26	55	45	4 x M5	10	320	26	171	119	0,15
28 x 36	16	20	26	55	45	4 x M5	10	360	26	153	119	0,13
30 x 36	16	20	26	55	45	4 x M5	10	385	26	143	119	0,12
32 x 42	16	20	28	62	51	4 x M5	10	410	26	134	102	0,21
35 x 42	16	20	28	62	51	4 x M5	10	450	26	122	102	0,18
36 x 42	16	20	28	62	51	4 x M5	10	465	26	119	102	0,17
38 x 44	16	20	28	66	54	4 x M6	17	690	36	159	137	0,18
40 x 48	16	20	28	70	58	4 x M6	17	725	36	151	126	0,22
42 x 48	16	20	28	70	58	4 x M6	17	765	36	144	126	0,20
45 x 55	20	25	35	82	67	4 x M8	41	1510	67	199	163	0,39
48 x 55	20	25	35	82	67	4 x M8	41	1610	67	186	163	0,34
50 x 62	20	25	35	89	74	4 x M8	41	1680	67	179	144	0,48
55 x 62	20	25	35	89	74	4 x M8	41	1850	67	163	144	0,38
60 x 72	20	25	35	99	84	4 x M8	41	2020	67	149	124	0,55
65 x 72	20	25	35	99	84	4 x M8	41	2190	67	138	124	0,44




Rexnord Tollok TLK 136

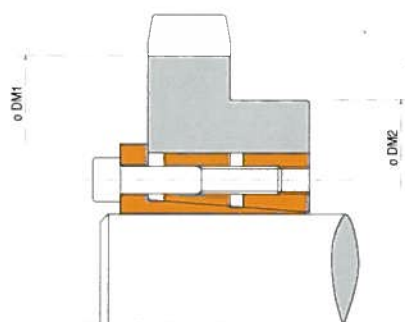

Characteristics

- High torque, high bending moments
- Excellent shaft-hub perpendicularity
- Low surface pressures
- Quick installation time



* For diameters > 420 mm

Dimensions						Torque			Axial force			Surface pressures on				Tightening screws 1		Tightening screws 2		Weight
												Shaft		Hub		DIN912 12.9	Tightening torque	DIN912 12.9	Tightening torque	
d x D mm	L1 mm	L2 mm	L3 mm	B mm	D1 mm	Mt,1 Nm	Mt,2 Nm	Mt,tot Nm	Fax,1 KN	Fax,2 KN	Fax,tot KN	pa,1 N/mm²	pa,2 N/mm²	pb,1 N/mm²	pb,2 N/mm²	N° x Type	Mt, Nm	N° x Type	Mt, Nm	Kg
100 x 150	26	61	82	96	159	11600	8500	20100	233	170	403	238	174	159	116	7 x M14	230	7 x M12	145	6,3
110 x 160	26	61	82	96	169	12800	9300	22100	233	170	403	217	158	149	109	7 x M14	230	7 x M12	145	6,8
120 x 170	26	61	82	96	179	13900	10200	24100	233	170	403	199	145	140	103	7 x M14	230	7 x M12	145	7,3
130 x 190	30	71	95	111	199	24000	17200	41200	370	266	636	253	182	173	125	8 x M16	355	8 x M14	230	11,1
140 x 200	30	71	95	111	209	25900	18600	44500	370	266	636	235	169	164	118	8 x M16	355	8 x M14	230	11,8
150 x 210	30	71	95	111	219	27700	19900	47600	370	266	636	219	158	157	113	8 x M16	355	8 x M14	230	12,5
160 x 220	30	71	95	111	229	29600	21200	50800	370	266	636	205	148	149	108	8 x M16	355	8 x M14	230	13,1
170 x 240	40	92	122	142	249	49100	31400	80500	578	370	948	226	145	160	103	8 x M20	690	8 x M16	355	21,3
180 x 250	40	92	122	142	259	52000	33300	85300	578	370	948	214	137	154	99	8 x M20	690	8 x M16	355	22,3
190 x 260	40	92	122	142	269	54900	35100	90000	578	370	948	202	130	148	95	8 x M20	690	8 x M16	355	23,3
200 x 270	40	92	122	142	279	72200	46300	118500	722	463	1185	240	154	178	114	10 x M20	690	10 x M16	355	24,6
220 x 290	40	92	122	142	299	79400	50900	130300	722	463	1185	218	140	166	106	10 x M20	690	10 x M16	355	26,5
240 x 310	40	92	122	142	319	104000	66600	170600	867	555	1422	240	154	186	119	12 x M20	690	12 x M16	355	28,7
260 x 330	40	92	122	142	339	112700	72100	184800	867	555	1422	222	142	175	112	12 x M20	690	12 x M16	355	30,8
280 x 365	45	108	144	168	374	145400	101000	246400	1039	722	1761	219	153	168	117	10 x M24	1200	10 x M20	690	46,5
300 x 385	45	108	144	168	394	155800	108300	264100	1039	722	1761	205	143	160	111	10 x M24	1200	10 x M20	690	49,5
320 x 405	45	108	144	168	414	199500	138700	338200	1247	867	2114	230	160	182	127	12 x M24	1200	12 x M20	690	52,7
340 x 425	45	108	144	168	434	247100	172000	419100	1454	1012	2466	253	176	202	141	14 x M24	1200	14 x M20	690	55,1
360 x 445	45	108	144	168	454	261700	182100	443800	1454	1012	2466	239	166	193	135	14 x M24	1200	14 x M20	690	58,6
380 x 465	45	108	144	168	474	315700	219600	535300	1662	1156	2818	258	180	217	147	16 x M24	1200	16 x M20	690	61,7
400 x 485	45	108	144	168	494	332400	231200	563600	1662	1156	2818	246	171	203	141	16 x M24	1200	16 x M20	690	64,4
420 x 505	45	108	144	168	514	349000	242700	591700	1662	1156	2818	234	163	195	136	16 x M24	1200	16 x M20	690	67,5
440 x 525	59	147	178	202	534	365600	254300	619900	1662	1156	2818	170	143	119	100	16 x M24	1200	16 x M20	690	86,0
460 x 545	59	147	178	202	554	382200	265800	648000	1662	1156	2818	163	138	114	96	16 x M24	1200	16 x M20	690	89,4
480 x 565	59	147	178	202	574	398800	277400	676200	1662	1156	2818	156	133	109	93	16 x M24	1200	16 x M20	690	92,9
500 x 585	59	147	178	202	594	467500	325200	792700	1870	1301	3171	169	144	118	101	18 x M24	1200	18 x M20	690	96,5
520 x 605	59	147	178	202	614	486200	338200	824400	1870	1301	3171	162	140	113	97	18 x M24	1200	18 x M20	690	100
540 x 625	59	147	178	202	634	504900	351200	856100	1870	1301	3171	156	135	109	94	18 x M24	1200	18 x M20	690	104
560 x 645	59	147	178	202	654	523600	364200	887800	1870	1301	3171	151	131	105	91	18 x M24	1200	18 x M20	690	107
580 x 665	59	147	178	202	674	602600	419000	1021600	2078	1445	3523	162	141	113	98	20 x M24	1200	20 x M20	690	111
600 x 685	59	147	178	202	694	623400	433500	1056900	2078	1445	3523	156	137	109	95	20 x M24	1200	20 x M20	690	114